




RIF. UCR

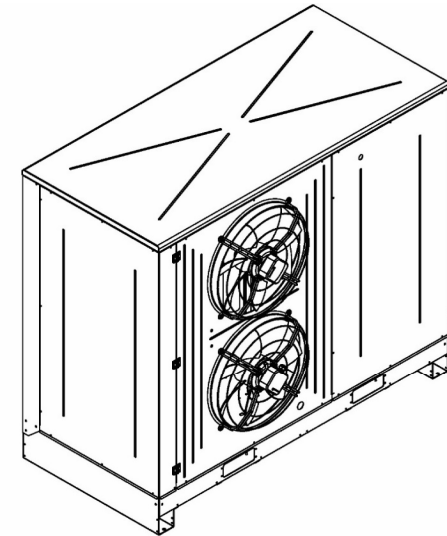

MODELLO	MODELL		9 HP
MODEL	MODÈLE		74841682
COMPRESSORE	KOMPRESSOR		BITZER
COMPRESSOR	COMPRESSEUR		4TES-9Y
POTENZA FRIGORIFERA	KALTELEISTUNG	W	23300 (-10/+40)
REFRIGERATION POWER	UISSANCE FRIGORIFIQUE		8820 (-30/+40)
POTENZA ASSORBITA	LEISTUNGS-AUFNAHME	W	5420 (-30/+40)
ABSORBED POWER	PUISSANCE ASSORBÉE		
MASSIMA CORRENTE	MAX STROM-AUFNAHME	A	24
MAX CURRENT	COURANT MAXIMUM		
TENSIONE E FREQUENZA	NETZSPANNUNG UND FREQUENZ	V / Hz	400 / 3+N+T / 50
VOLTAGE & FREQUENCY	TENSION ET FREQUENCE		
PESO NETTO	REINGEWICHT	KG	439
NET WEIGHT	POIDS NET		
RUMORE	LAUTSTARKE	DB	60
NOISE	BRUIT	5M	SILENT
DIMENSIONI	AMBENSUGGEN	MM	1705 x 945 x 1500
DIMENSIONS	DIMENSIONS	LxPxH	
CLASSE CLIMATICA	KLIMATISCHE KLASSE	INDEX	5 (40°C)
CLIMATIC CLASS	CLASSE CLIMATIQUE		> -15°C
CAVI ELETTRICI	ELEKTROKABEL	P x MMQ	4 x 4
ELECTRICAL CABLE	CÂBLES ÉLECTRIQUES		12 x 1
DIMENSIONI IMBALLO	AMBENSUGGEN VERPACKUNG	MM	1900 x 1080 x 1729
PACKING DIMENSIONS	DIMENSIONS EMBALLAGE	LxPxH	
VENTILATORE	VENTILATOR	MM	Ø 500 (900 rpm)
FAN	VENTILATEUR	MC/H	10925
Ø TUBI GAS	Ø LEITUNGEN GAS	10 M	16 - 16 - 28 mm
Ø GAS PIPES	Ø TUYAUX GAZ	20 M	16 - 16 - 28 mm
		30 M	16 - 16 - 35 mm
		40 M	16 - 16 - 35 mm
		50 M	16 - 16 - 35 mm
CARICA GAS INIZIALE *	ANFÄNGLICHE GAS BELADT *	10 M	7 Kg
START GAS CHARGE *	CHARGE DE GAZ INITIALE *	20 M	7.5 Kg
		30 M	8 Kg
		40 M	8.5 Kg
		50 M	9 Kg

* Dopo aver eseguito la carica gas iniziale, aggiungere gas fino al riempimento della spia di liquido.

* After the initial gas charge, add gas to the filling of the sight glass.

* Nach der Durchführung der anfänglichen Gasladung, fügen Gas zum Füllen des Schauglases.

* Après avoir effectué la charge de gaz initial, ajouter du gaz de remplissage du verre de visée.

